



SURYA
PANEL

Canvas of your imagination

Canvas Series
Extra width
Flooring Panels



SURYA CLICK
Canvas Series

HDF LAMINATE FLOORING



15066 | Chatham Oak



15067 | Clashmore Oak



15068 | Girona Walnut Brown



15069 | Girona Walnut Grey



15070 | Jarrah




15071 | Mauvella Oak



15072 | Pembroke Walnut



15073 | White Oiled Oak Natural Light

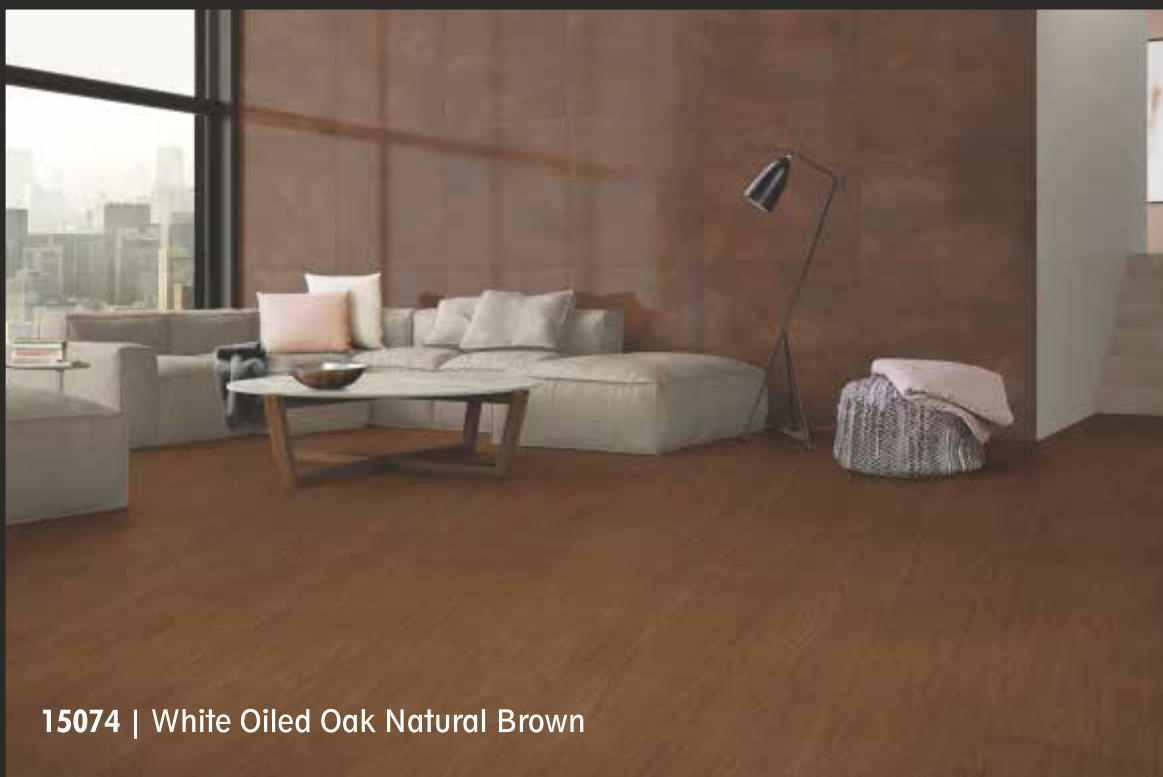

15074 | White Oiled Oak Natural Brown



15075 | Oak Rustic



15076 | Walnut Mocca



15077 | Oak Coffee Brown Dark





15066 | Chatham Oak

T3



15067 | Clashmore Oak

T2



15068 | Girona Walnut Brown

T3



15069 | Girona Walnut Grey

T2



15070 | Jarrah

T2



15071 | Mauvella Oak

T3



15072 | Pembroke Walnut

T3



15073 | White Oiled Oak Natural Light

T2



15074 | White Oiled Oak Natural Brown

T2



15075 | Oak Rustic

T3



15076 | Walnut Mocca


T2



15077 | Oak Coffee Brown Dark

T3

STRUCTURE

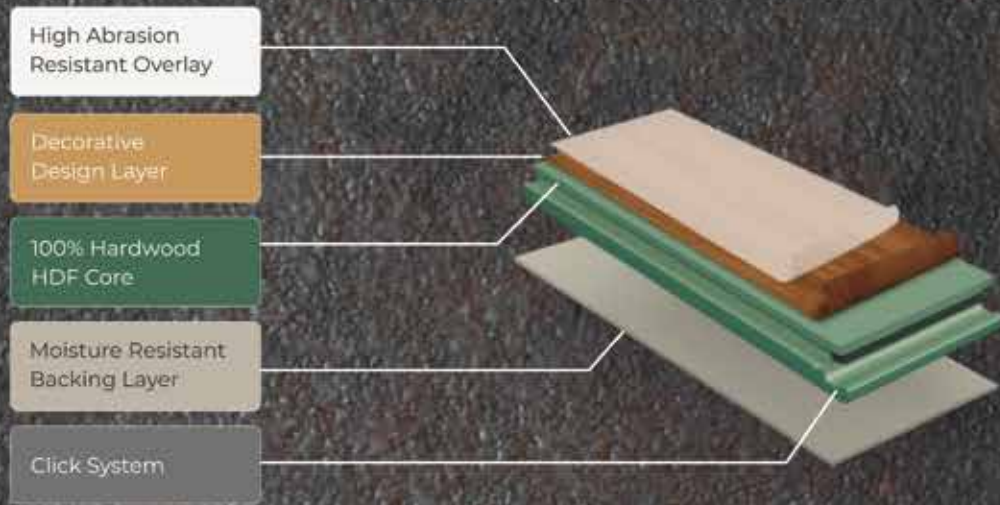

FEATURES

- TERMITE, BORER AND FUNGUS RESISTANT
- ENVIRONMENT FRIENDLY
- SUITABLE FOR UNDERFLOOR HEATING
- EASY TO CLEAN AND MAINTAIN
- CIGARETTE BURN RESISTANT
- GLUE FREE INSTALLATION

The various classes according to usage for wear and tear are given below :

- Class 32 / AC4 : Moderate Commercial
- Class 33 / AC5 : Heavy Commercial

Laminate Flooring Rating are Explained Below :

- AC Abrasion Class are standardized measures adopted by the Association of the European producers of laminate flooring (EPFL). AC measures combines abrasion resistance, impact resistance, resistance to stains, cigarette burns & thickness swelling along the edges.
- AC4 can be installed in moderate commercial areas such as boutiques, personal cabin.
- AC5 can be installed in heavy commercial areas such as offices, showrooms & hotels.
- In all flooring application good quality door matt is recommended at entry ways to prevent dirt & sand particles coming on floors.

- EASY TO INSTALL**
Fast and easy single action installation
- STABILITY**
Strong, resilient and dimensional stability
- IMPROVES SOUND INSULATION**
- IMPACT RESISTANT**
High resistance to impact or abrasion from furniture legs & chair
- FIRE RETARDANT**
Resistant to heat and flame
- SLIP RESISTANT**
Skid-free and slip resistant

Range

Texture	Two Textures T2 & T3
Size	Plank Size (1190 mm x 220 mm)
Thickness	8 mm & 12 mm*
Grades / Applications	AC4 AC5*

*subject to minimum order quantity.

TECHNICAL SPECIFICATIONS

PRODUCT FEATURE	TEST STANDARD	AC4
Abrasion Resistance	EN13329	AC4
Impact Resistance	EN13329	IC1
Stain Resistance	EN438	Group 5
Cigarette Burns	EN438	Class 5
Light Fastness	EN20105/A02	Class 7
Furniture Legs	EN426	No Damage
Chair Caster (Soft Roll)	EN425	No Damage
Thickness Swelling	EN13329	0.18
Static Indentation	EN433	0.9 N/mm ²
Flame Resistance	EN13501	CFL-S1
Floor Design Dimensions		1190mm x 220mm x 8mm/12mm

